

Product
Catalogue
(02)



...lights forever

An ISO 9001:2008 Co.



KCSAD starts a new era of lighting, full of new concepts for lights forever...



INTRODUCTION

KCSAD, a new name in the world of lighting industry has entered the market with a vision to satisfy the ardent need of valuable customers with promising sale and excellent after sale services. Globally, LED lighting has been widely accepted to replace incandescent & CFL due to its unbelievable energy saving, long lasting life being eco-friendly, no mercury & UV and above all low maintenance cost.

KCSAD, with the capability of facing new challenges and finishing the best opportunities, has planted a manufacturing unit from where it can lit its light to various parts of the world. The unit has been designed to provide all type of drivers , LED panels, COB, LED strips and various other LED lighting product comprising of cabinet lights etc. all under one roof. Its **KCSAD's** primary concern to keep the customers in comfort zone for which it fulfils it by providing customers a special on-wheel showroom at their site so that they can easily satisfy their decision.

At **KCSAD**, innovation is a never ending journey. Our passion for innovation and quality drives us to develop and deliver new products and solutions for our customers time to time. **KCSAD** is helping customers all over the country to cheerfully illuminate their workplace and meet their energy saving needs through various offerings.

KCSAD has developed and implemented a quality management system complying with ISO 9001. We never compromise the quality against price. Never be surprised by unexpected cost for protection, repair and support. By choosing **KCSAD**, you can confidently ensure yourself with the satisfactory investment over our quality and their respective prices.

Long lasting life, energy saving and satisfactory price is what make **KCSAD** a promising brand.

That's why **KCSAD** defines itself as "LIGHTS FOREVER".



LED BULB / TUBE LIGHT

LED SLIM PANEL LIGHT

LED DOWN LIGHT

LED DUAL LIGHT (CONCEALED)

LED COB LIGHT
(Detachable)

LED COB SPOT LIGHT
(Movable)

LED COB DEEP SPOT LIGHT

LED COB LIGHT (TRIMLESS)

LED SLIM COB LIGHT

LED COB CABINET / DECORATIVE LIGHT

LED STRIP LIGHT
(Cutttable)

LED OUTDOOR LIGHTING

LED STREET LIGHT / FLOOD LIGHT / HI-BAY



LED BULB - 0.5 W

SPECIFICATIONS OF 0.5 LED BULB

Details	Cat No.	Input Power	Voltage	Beam Angle	Operating Temperature	Base
Milky	KDB 0.5-W	0.5W	90-300 V AC - 50Hz	270 deg	(-20 deg to 60 deg centigrade)	B22
Yellow	KDB 0.5-Y	0.5W	90-300 V AC - 50Hz	270 deg	(-20 deg to 60 deg centigrade)	B22
Red	KDB 0.5-R	0.5W	90-300 V AC - 50Hz	270 deg	(-20 deg to 60 deg centigrade)	B22
Blue	KDB 0.5-B	0.5W	90-300 V AC - 50Hz	270 deg	(-20 deg to 60 deg centigrade)	B22
Green	KDB 0.5-G	0.5W	90-300 V AC - 50Hz	270 deg	(-20 deg to 60 deg centigrade)	B22

LED 0.5 W BULB

Highly energy saver multicolour decorative 0.5 led bulb with longer life, a perfect replacement of traditional 15wt for decorative purposes & night Lamp.



LED BULB

3W/5W/7W/9W/15W



Replacement of CFL, produces more light, life & brightness. Saves your electricity bill tremendously & eco friendly to atmosphere with No MERCURY. Suitable for domestic and commercial places.

BULB SPECIFICATIONS

Details	Input Power	Input Voltage	Colour Temp.	CRI	Beam Angle	Lumens	Operating Temperature	Base
KDB03	3W	90-300V AC - 50Hz	6500K / 3000K	More than 80	220 deg	300	(-20 deg to 60 deg centigrade)	B22
KDB05	5W	90-300 V AC - 50Hz	6500K / 3000K	More than 80	240 deg	500	(-20 deg to 60 deg centigrade)	B22
KDB07	7W	90-300 V AC - 50Hz	6500K / 3000K	More than 80	240 deg	700	(-20 deg to 60 deg centigrade)	B22
KDB09	9W	90-300 V AC - 50Hz	6500K / 3000K	More than 80	280 deg	900	(-20 deg to 60 deg centigrade)	B22
KDB15	15W	90-300 V AC - 50Hz	6500K / 3000K	More than 80	280 deg	1500	(-20 deg to 60 deg centigrade)	B22



LED ROCKET LAMP

26W/36W/45W



Replacement of CFL, produces more light, life & brightness. Saves your electricity bill tremendously & eco friendly to atmosphere with No MERCURY. Suitable for domestic and commercial places.

ROCKET BULB SPECIFICATIONS

Details	Input Power	Input Voltage	Colour Temp.	CRI	Lumens	Operating Temperature	Base
KDB26	26W	90-300V AC - 50Hz	6500K / 3000K	More than 80	2600	(-20 deg to 60 deg centigrade)	B22
KDB36	36W	90-300 V AC - 50Hz	6500K / 3000K	More than 80	3600	(-20 deg to 60 deg centigrade)	B22
KDB45	45W	90-300 V AC - 50Hz	6500K / 3000K	More than 80	4500	(-20 deg to 60 deg centigrade)	B22



LED SQUARE TUBE LIGHT

5W/10W/20W

5W 1 Ft.

KDT505

WORKING VOLTAGE : AC100-240V 50/60Hz

POWER : 5W

CRI : ≥ 70

LUMINOUS FLUX : $\geq 450\text{lm}$

COLOR TEMPERATURE : 3000-4000-6000K

LIFETIME : 50000H



10W 2 Ft.

KDT510

WORKING VOLTAGE : AC100-240V 50/60Hz

POWER : 10W

CRI : ≥ 70

LUMINOUS FLUX : $\geq 900\text{lm}$

COLOR TEMPERATURE : 3000-4000-6000K

LIFETIME : 50000H

20W 4 Ft.

KDT520

WORKING VOLTAGE : AC100-240V 50/60Hz

POWER : 20W

CRI : ≥ 70

LUMINOUS FLUX : $\geq 1800\text{lm}$

COLOR TEMPERATURE : 3000-4000-6000K

LIFETIME : 50000H



LED DUAL LIGHT

5W/7W



5W/7W

KDCL275/KDCL307

WORKING VOLTAGE: AC100-300V 50/60Hz
POWER : 5W/7W
LED TYPE: EPISTAR
CRI: ≥ 80
LUMINOUS FLUX: $\geq 350\text{lm}$
BEAM ANGLE: 120°
MATERIAL: Die-casting Aluminium
LAMP SIZE: 110 $\times$ 55 MM
HOLE SIZE: 70 MM
COLOR TEMPERATURE: 4000-6500K R/G/B
LIFETIME: 50000H

COB JUNCTION BOX

3W

Powered by: **EPISTAR**
from Taiwan

3W

KDC173

WORKING VOLTAGE: AC100-300V 50/60Hz
POWER : 3W
LED TYPE: EPISTAR
CRI: ≥ 80
LUMINOUS FLUX: $\geq 330\text{lm}$
BEAM ANGLE: 120°
MATERIAL: Die-casting Aluminium
LAMP SIZE: 65 MM
HOLE SIZE: 40 MM
COLOR TEMPERATURE: 4000-6500K R/G/B
LIFETIME: 50000H



E-mail : info@kcsadled.com
Website : www.kcsadled.com



LED DUAL LIGHT

12W/24W RD/SQ



Powered by: **EPISTAR**
from Taiwan

12W

KDCL412 RD/SQ

WORKING VOLTAGE: AC100-300V 50/60Hz
POWER : 12W
LED TYPE: EPISTAR
CRI: ≥ 80
LUMINOUS FLUX: ≥ 960 lm
BEAM ANGLE: 120°
MATERIAL: Die-casting Aluminium
LAMP SIZE: $132 \times 132 \times 70$ MM
HOLE SIZE: 100×70 MM
COLOR TEMPERATURE: 4000-6000K
LIFETIME: 50000H

24W

KDCL624 RD/SQ

WORKING VOLTAGE: AC100-300V 50/60Hz
POWER : 24W
LED TYPE: EPISTAR
CRI: ≥ 80
LUMINOUS FLUX: ≥ 1920 lm
BEAM ANGLE: 120°
MATERIAL: Die-casting Aluminium
LAMP SIZE: $175 \times 175 \times 105$ MM
HOLE SIZE: 145×105 MM
COLOR TEMPERATURE: 4000-6000K
LIFETIME: 50000H



E-mail : info@kcsadled.com
Website : www.kcsadled.com



LED SLIM PANEL LIGHT Series

Ultraslim panel light adopts the SMD luminous technology matching a high efficiency light guide plate, the output is soft even. small and light design. The Luminous efficiency is more economical. This kind of products are widely applied to commercial hotel, medical places, household decoration and other lighting places.

DIE-CASTING ALUMINIUM SLIM LIGHTING SERIES

4W/8W/14W/20W SQ

4W

KDPL304 SQ

WORKING VOLTAGE: AC100-300V 50/60Hz
POWER : 4W
LED TYPE: EDISON
CRI: ≥ 80
LUMINOUS FLUX: ≥ 255 lm
BEAM ANGLE: 120°
MATERIAL: Die-casting Aluminium
LAMP SIZE: 85*85*25MM
HOLE SIZE: 72*72MM
COLOR TEMPERATURE: 4000-6500K
LIFETIME: 50000H

8W

KDPL408 SQ

WORKING VOLTAGE: AC100-300V 50/60Hz
POWER : 8W
LED TYPE: EDISON
CRI: ≥ 80
LUMINOUS FLUX: ≥ 510 lm
BEAM ANGLE: 120°
MATERIAL: Die-casting Aluminium
LAMP SIZE: 120*120*25MM
HOLE SIZE: 105*105MM
COLOR TEMPERATURE: 4000-6500K
LIFETIME: 50000H



Powered by:  **EDISON**
from Taiwan

14W

KDPL614 SQ

WORKING VOLTAGE: AC100-300V 50/60Hz
POWER : 14W
LED TYPE: EDISON
CRI: ≥ 80
LUMINOUS FLUX: ≥ 1020 lm
BEAM ANGLE: 120°
MATERIAL: Die-casting Aluminium
LAMP SIZE: 172*172*25MM
HOLE SIZE: 160*160MM
COLOR TEMPERATURE: 4000-6500K
LIFETIME: 50000H

20W

KDPL820 SQ

WORKING VOLTAGE: AC100-300V 50/60Hz
POWER : 20W
LED TYPE: EDISON
CRI: ≥ 80
LUMINOUS FLUX: ≥ 1530 lm
BEAM ANGLE: 120°
MATERIAL: Die-casting Aluminium
LAMP SIZE: 225*225*25MM
HOLE SIZE: 210*210MM
COLOR TEMPERATURE: 4000-6500K
LIFETIME: 50000H



E-mail : info@kcsadled.com
Website : www.kcsadled.com



DIE-CASTING ALUMINIUM SLIM LIGHTING SERIES

4W/8W/14W/20W RD

4W

KDPL304 RD

WORKING VOLTAGE: AC100-300V 50/60Hz
POWER : 4W
LED TYPE: EDISON
CRI: ≥ 80
LUMINOUS FLUX: ≥ 255 lm
BEAM ANGLE: 120°
MATERIAL: Die-casting Aluminium
LAMP SIZE: $\Phi 85 \times 25$ MM
HOLE SIZE: $\Phi 72$ MM
COLOR TEMPERATURE: 4000-6500K
LIFETIME: 50000H

8W

KDPL408 RD

WORKING VOLTAGE: AC100-300V 50/60Hz
POWER : 8W
LED TYPE: EDISON
CRI: ≥ 80
LUMINOUS FLUX: ≥ 510 lm
BEAM ANGLE: 120°
MATERIAL: Die-casting Aluminium
LAMP SIZE: $\Phi 120 \times 25$ MM
HOLE SIZE: $\Phi 105$ MM
COLOR TEMPERATURE: 4000-6500K
LIFETIME: 50000H



Powered by:  **EDISON**
from Taiwan

14W

KDPL614 RD

WORKING VOLTAGE: AC100-300V 50/60Hz
POWER : 14W
LED TYPE: EDISON
CRI: ≥ 80
LUMINOUS FLUX: ≥ 1020 lm
BEAM ANGLE: 120°
MATERIAL: Die-casting Aluminium
LAMP SIZE: $\Phi 172 \times 25$ MM
HOLE SIZE: $\Phi 160$ MM
COLOR TEMPERATURE: 4000-6500K
LIFETIME: 50000H

20W

KDPL820 RD

WORKING VOLTAGE: AC100-300V 50/60Hz
POWER : 20W
LED TYPE: EDISON
CRI: ≥ 80
LUMINOUS FLUX: ≥ 1530 lm
BEAM ANGLE: 120°
MATERIAL: Die-casting Aluminium
LAMP SIZE: $\Phi 225 \times 25$ MM
HOLE SIZE: $\Phi 210$ MM
COLOR TEMPERATURE: 4000-6500K
LIFETIME: 50000H



E-mail : info@kcsadled.com
Website : www.kcsadled.com




OFFICE PANEL LIGHT SERIES

24W/40W/48W SQ



Powered by: **EPISTAR**
from Taiwan

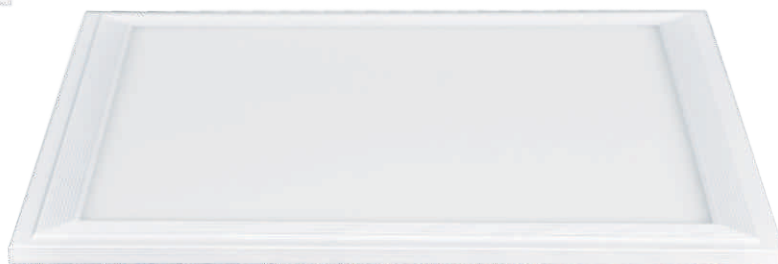

24W

KDPL1224

INPUT VOLTAGE: AC100-300V 50/60Hz
POWER :24W
LED TYPE: EPISTAR
CRI: ≥ 75
PF: ≥ 0.95
LUMINOUS FLUX: $\geq 1300\text{lm}$
BEAM ANGLE: 120°
MATERIAL: Aluminium Alloy
LAMP SIZE: 300*300*25MM
COLOR TEMPERATURE: 4000-6500K
LIFETIME: 50000H

40W/48W

KDPL2440/KDPL2448 SQ

INPUT VOLTAGE: AC100-300V 50/60Hz
POWER :48W
LED TYPE: EPISTAR
CRI: ≥ 75
PF: ≥ 0.95
LUMINOUS FLUX: $\geq 3240\text{lm}$
BEAM ANGLE: 120°
MATERIAL: Aluminium Alloy
LAMP SIZE: 600*600*25MM
COLOR TEMPERATURE: 4000-6500K
LIFETIME: 50000H



LED DOWN LIGHT SERIES

6W/12W/18W/22W SQ

6W

KDDL416 SQ

WORKING VOLTAGE: AC100-300V 50/60Hz
POWER : 6W
LED TYPE: EPISTAR
CRI: ≥ 80
LUMINOUS FLUX: $\geq 600\text{lm}$
BEAM ANGLE: 120°
LAMP SIZE: $116 \times 116 \times 36\text{ MM}$
HOLE SIZE: $100 \times 100\text{ MM}$
COLOR TEMPERATURE: 4000-6000K
LIFETIME: 50000H



12W

KDDL6112 SQ

WORKING VOLTAGE: AC100-300V 50/60Hz
POWER : 12W
LED TYPE: EPISTAR
CRI: ≥ 80
LUMINOUS FLUX: $\geq 1200\text{lm}$
BEAM ANGLE: 120°
LAMP SIZE: $166 \times 166 \times 36\text{ MM}$
HOLE SIZE: $150 \times 150\text{ MM}$
COLOR TEMPERATURE: 4000-6000K
LIFETIME: 50000H

Powered by: **EPISTAR**
from Taiwan

18W

KDDL8218 SQ

WORKING VOLTAGE: AC100-300V 50/60Hz
POWER : 18W
LED TYPE: EPISTAR
CRI: ≥ 80
LUMINOUS FLUX: $\geq 1800\text{lm}$
BEAM ANGLE: 120°
LAMP SIZE: $220 \times 220 \times 36\text{ MM}$
HOLE SIZE: $205 \times 205\text{ MM}$
COLOR TEMPERATURE: 4000-6000K
LIFETIME: 50000H

22W

KDDL8222 SQ

WORKING VOLTAGE: AC100-300V 50/60Hz
POWER : 22W
LED TYPE: EPISTAR
CRI: ≥ 80
LUMINOUS FLUX: $\geq 2200\text{lm}$
BEAM ANGLE: 120°
LAMP SIZE: $220 \times 220 \times 36\text{ MM}$
HOLE SIZE: $205 \times 205\text{ MM}$
COLOR TEMPERATURE: 4000-6000K
LIFETIME: 50000H



E-mail : info@kcsadled.com
Website : www.kcsadled.com



LED DOWN LIGHT SERIES

6W/12W/18W/22W RD

6W

KDDL416 RD

WORKING VOLTAGE: AC100-300V 50/60Hz
POWER : 6W
LED TYPE: EPISTAR
CRI: ≥ 80
LUMINOUS FLUX: $\geq 600\text{lm}$
BEAM ANGLE: 120°
LAMP SIZE: $116 \times 116 \times 36\text{ MM}$
HOLE SIZE: 100 MM
COLOR TEMPERATURE: 4000-6000K
LIFETIME: 50000H

12W

KDDL6112 RD

WORKING VOLTAGE: AC100-300V 50/60Hz
POWER : 12W
LED TYPE: EPISTAR
CRI: ≥ 80
LUMINOUS FLUX: $\geq 1200\text{lm}$
BEAM ANGLE: 120°
LAMP SIZE: $166 \times 166 \times 36\text{ MM}$
HOLE SIZE: 150 MM
COLOR TEMPERATURE: 4000-6000K
LIFETIME: 50000H



Powered by: **EPISTAR**
from Taiwan

18W

KDDL8218 RD

WORKING VOLTAGE: AC100-300V 50/60Hz
POWER : 18W
LED TYPE: EPISTAR
CRI: ≥ 80
LUMINOUS FLUX: $\geq 1800\text{lm}$
BEAM ANGLE: 120°
LAMP SIZE: $220 \times 220 \times 36\text{ MM}$
HOLE SIZE: 205MM
COLOR TEMPERATURE: 4000-6000K
LIFETIME: 50000H

22W

KDDL8222 RD

WORKING VOLTAGE: AC100-300V 50/60Hz
POWER : 22W
LED TYPE: EPISTAR
CRI: ≥ 80
LUMINOUS FLUX: $\geq 2200\text{lm}$
BEAM ANGLE: 120°
LAMP SIZE: $220 \times 220 \times 36\text{ MM}$
HOLE SIZE: 205MM
COLOR TEMPERATURE: 4000-6000K
LIFETIME: 50000H



E-mail : info@kcsadled.com
Website : www.kcsadled.com



DIE-CASTING ALUMINIUM SLIM LIGHTING SERIES

8W/15W/22W SQ

8W

KDSP408 SQ

WORKING VOLTAGE : AC100-300V 50/60Hz
POWER : 8W
LED TYPE : EDISON
CRI : ≥ 80
LUMINOUS FLUX : $\geq 640\text{lm}$
BEAM ANGLE : 120°
MATERIAL : Die-casting Aluminium
LAMP SIZE : 92*92*23MM
COLOR TEMPERATURE : 3000-4000-6000K
LIFETIME : 50000H



15W

KDSP615 SQ

WORKING VOLTAGE : AC100-300V 50/60Hz
POWER : 15W
LED TYPE : EDISON
CRI : ≥ 80
LUMINOUS FLUX : $\geq 1200\text{lm}$
BEAM ANGLE : 120°
MATERIAL : Die-casting Aluminium
LAMP SIZE : 140*140*23MM
COLOR TEMPERATURE : 3000-4000-6000K
LIFETIME : 50000H

22W

KDSP822 SQ

WORKING VOLTAGE : AC100-300V 50/60Hz
POWER : 22W
LED TYPE : EDISON
CRI : ≥ 80
LUMINOUS FLUX : $\geq 1760\text{lm}$
BEAM ANGLE : 120°
MATERIAL : Die-casting Aluminium
LAMP SIZE : 192*192*23MM
COLOR TEMPERATURE : 3000-4000-6000K
LIFETIME : 50000H



DIE-CASTING ALUMINIUM SLIM LIGHTING SERIES

8W/15W/22W RD

8W

KDSP408 RD

WORKING VOLTAGE : AC100-300V 50/60Hz
POWER : 8W
LED TYPE : EDISON
CRI : ≥ 80
LUMINOUS FLUX : ≥ 640 lm
BEAM ANGLE : 120°
MATERIAL : Die-casting Aluminium
LAMP SIZE : 92*92*23MM
COLOR TEMPERATURE : 3000-4000-6000K
LIFETIME : 50000H



15W

KDSP615 RD

WORKING VOLTAGE : AC100-300V 50/60Hz
POWER : 15W
LED TYPE : EDISON
CRI : ≥ 80
LUMINOUS FLUX : ≥ 1200 lm
BEAM ANGLE : 120°
MATERIAL : Die-casting Aluminium
LAMP SIZE : 140*140*23MM
COLOR TEMPERATURE : 3000-4000-6000K
LIFETIME : 50000H

22W

KDSP822 RD

WORKING VOLTAGE : AC100-300V 50/60Hz
POWER : 22W
LED TYPE : EDISON
CRI : ≥ 80
LUMINOUS FLUX : ≥ 1760 lm
BEAM ANGLE : 120°
MATERIAL : Die-casting Aluminium
LAMP SIZE : 192*192*23MM
COLOR TEMPERATURE : 3000-4000-6000K
LIFETIME : 50000H





LED COB SPOT / DECORATIVE LIGHT Series

Ambiance lighting products enjoys a fashionable shape, exquisite craft, vivid colors, which can present a colorful decoration effect with the feature of light shadow. this kind of products can be widely used in commercial hotel, entertainment space, home decoration and other places.



LED COB DEEP SPOT LIGHT

18W/30W/40W

18W

KDC4718 RD

WORKING VOLTAGE: AC90-300V 50/60Hz
POWER : 18W
CRI: ≥ 80
PF: ≥ 0.95
LUMINOUS FLUX: $\geq 1800\text{lm}$
BEAM ANGLE: 40°
MATERIAL: Die-casting Aluminium
LAMP SIZE: $140 \times 140 \times 92\text{ MM}$
HOLE SIZE: $120 \times 120\text{ MM}$
COLOR TEMPERATURE: 3000-6500K
LIFETIME: 50000H



Powered by: 

30W

KDC5730 RD

WORKING VOLTAGE: AC90-300V 50/60Hz
POWER : 30W
CRI: ≥ 80
PF: ≥ 0.95
LUMINOUS FLUX: $\geq 3000\text{lm}$
BEAM ANGLE: 40°
MATERIAL: Die-casting Aluminium
LAMP SIZE: $165 \times 165 \times 110\text{ MM}$
HOLE SIZE: $145 \times 145\text{ MM}$
COLOR TEMPERATURE: 3000-6500K
LIFETIME: 50000H

40W

KDC6340 RD

WORKING VOLTAGE: AC90-300V 50/60Hz
POWER : 40W
CRI: ≥ 80
PF: ≥ 0.95
LUMINOUS FLUX: $\geq 4000\text{lm}$
BEAM ANGLE: 40°
MATERIAL: Die-casting Aluminium
LAMP SIZE: $190 \times 190 \times 140\text{ MM}$
HOLE SIZE: $160 \times 160\text{ MM}$
COLOR TEMPERATURE: 3000-6500K
LIFETIME: 50000H



E-mail : info@kcsadled.com
Website : www.kcsadled.com



LED COB SPOT LIGHT (MOVABLE)

3.5W/7W/10W SQ

3.5W

KDMC235 SQ

WORKING VOLTAGE: AC90-300V 50/60Hz
POWER : 3.5W
LED TYPE: EPISTAR COB
CRI: ≥ 80
LUMINOUS FLUX: ≥ 220 lm
BEAM ANGLE: 38°
MATERIAL: Die-casting Aluminium
LAMP SIZE: 62*62*40MM
HOLE SIZE: 55*55MM
COLOR TEMPERATURE: 3000-6500K
LIFETIME: 50000H



Powered by: **EPISTAR**
from Taiwan

7W

KDCM307 SQ

WORKING VOLTAGE: AC90-300V 50/60Hz
POWER : 7W
LED TYPE: EPISTAR COB
CRI: ≥ 80
LUMINOUS FLUX: ≥ 500 lm
BEAM ANGLE: 45°
MATERIAL: Die-casting Aluminium
LAMP SIZE: 83*83*45MM
HOLE SIZE: 75*75MM
COLOR TEMPERATURE: 3000-6500K
LIFETIME: 50000H

10W

KDCM3510 SQ

WORKING VOLTAGE: AC90-300V 50/60Hz
POWER : 10W
LED TYPE: EPISTAR COB
CRI: ≥ 80
LUMINOUS FLUX: ≥ 750 lm
BEAM ANGLE: 45°
MATERIAL: Die-casting Aluminium
LAMP SIZE: 105*105*50MM
HOLE SIZE: 85*85MM
COLOR TEMPERATURE: 3000-6500K
LIFETIME: 50000H



E-mail : info@kcsadled.com
Website : www.kcsadled.com



LED COB SPOT LIGHT (MOVABLE)

3.5 W/7W/10W RD

3.5W

KDCM235 RD

WORKING VOLTAGE: AC90-300V 50/60Hz

POWER : 3.5W

LED TYPE: EPISTAR COB

CRI: ≥ 80

LUMINOUS FLUX: ≥ 220 lm

BEAM ANGLE: 38°

MATERIAL: Die-casting Aluminium

LAMP SIZE: 62*40MM

HOLE SIZE: 55MM

COLOR TEMPERATURE: 3000-6500K

LIFETIME: 50000H



Powered by: **EPISTAR**
from Taiwan

7W

KDCM307 RD

WORKING VOLTAGE: AC90-300V 50/60Hz

POWER : 7W

LED TYPE: EPISTAR COB

CRI: ≥ 80

LUMINOUS FLUX: ≥ 500 lm

BEAM ANGLE: 45°

MATERIAL: Die-casting Aluminium

LAMP SIZE: 83*45MM

HOLE SIZE: 75MM

COLOR TEMPERATURE: 3000-6500K

LIFETIME: 50000H

10W

KDCM3510 RD

WORKING VOLTAGE: AC90-300V 50/60Hz

POWER : 10W

LED TYPE: EPISTAR COB

CRI: ≥ 80

LUMINOUS FLUX: ≥ 750 lm

BEAM ANGLE: 45°

MATERIAL: Die-casting Aluminium

LAMP SIZE: 105*50MM

HOLE SIZE: 85MM

COLOR TEMPERATURE: 3000-6500K

LIFETIME: 50000H



E-mail : info@kcsadled.com
Website : www.kcsadled.com



LED COB LIGHT (DETACHABLE)

6W/12W/18W/24W/35W

FLAT/DEEP



Powered by: **EPISTAR**
from Taiwan



Details	KDCD406 RD	KDCD412 RD	KDCD518 RD	KDCD624 RD	KDCD635 RD
Input Power	6W	12W	18W	24W	35W
Input Voltage	AC 220-240V - 50Hz				
Power Factor	0.9				
Colour Temperature	3000K-6500K				
CRI	≥80				
Beam Angle	45°	45°	80°	80°	80°
Lumens ≥	460	920	1450	1900	2950
Lamp Size(mm)	Φ 110*55	Φ 110*55	Φ 140*65	Φ 170*65	Φ 170*65
Hole Size (mm)	Φ 85	Φ 85	Φ 115	Φ 155	Φ 155
Material	Die-Casting Aluminium				



LED COB LIGHT (DETACHABLE)

6W/12W/18W/24W/35W

FLAT/DEEP



Powered by: **EPISTAR**

Details	KDCD406 RD	KDCD412 RD	KDCD518 RD	KDCD624 RD	KDCD635 RD
Input Power	6W	12W	18W	24W	35W
Input Voltage	AC 220-240V - 50Hz				
Power Factor	0.9				
Colour Temperature	3000K-6500K				
CRI	≥80				
Beam Angle	45 ⁰	45 ⁰	80 ⁰	80 ⁰	80 ⁰
Lumens ≥	460	920	1450	1900	2950
Lamp Size(mm)	Φ 110*55	Φ 110*55	Φ 140*65	Φ 170*65	Φ 170*65
Hole Size (mm)	Φ 85	Φ 85	Φ 115	Φ 155	Φ 155
Material	Die-Casting Aluminium				



LED COB DEEP SPOT LIGHT (TRIMLESS)

5W/8W/12W SQ

5W

KDCM305 SQ

WORKING VOLTAGE: AC90-300V 50/60Hz
POWER : 5W
LED TYPE: EPISTAR COB
CRI: ≥ 80
PF: ≥ 0.95
LUMINOUS FLUX: $\geq 450\text{lm}$
BEAM ANGLE: 40°
MATERIAL: Die-casting Aluminium
LAMP SIZE: $85 \times 85 \times 73\text{ mm}$
HOLE SIZE: $75 \times 75\text{ mm}$
COLOR TEMPERATURE: 3000-4000-6500K
LIFETIME: 50000H



Powered by: **EPISTAR**
from Taiwan

8W

KDCM358 SQ

WORKING VOLTAGE: AC90-300V 50/60Hz
POWER : 8W
LED TYPE: EPISTAR COB
CRI: ≥ 80
PF: ≥ 0.95
LUMINOUS FLUX: $\geq 720\text{lm}$
BEAM ANGLE: 40°
MATERIAL: Die-casting Aluminium
LAMP SIZE: $100 \times 100 \times 80\text{ mm}$
HOLE SIZE: $90 \times 90\text{ mm}$
COLOR TEMPERATURE: 3000-4000-6500K
LIFETIME: 50000H

12W

KDCM3512 SQ

WORKING VOLTAGE: AC90-300V 50/60Hz
POWER : 12W
LED TYPE: EPISTAR COB
CRI: ≥ 80
PF: ≥ 0.95
LUMINOUS FLUX: $\geq 1080\text{lm}$
BEAM ANGLE: 40°
MATERIAL: Die-casting Aluminium
LAMP SIZE: $100 \times 100 \times 92\text{ mm}$
HOLE SIZE: $90 \times 90\text{ mm}$
COLOR TEMPERATURE: 3000-4000-6500K
LIFETIME: 50000H



E-mail : info@kcsadled.com
Website : www.kcsadled.com



LED COB DEEP SPOT LIGHT (TRIMLESS)

5W/8W/12W RD

5W

KDCM305 RD

WORKING VOLTAGE: AC90-300V 50/60Hz
POWER : 5W
LED TYPE: EPISTAR COB
CRI: ≥ 80
PF: ≥ 0.95
LUMINOUS FLUX: $\geq 450\text{lm}$
BEAM ANGLE: 40°
MATERIAL: Die-casting Aluminium
LAMP SIZE: $85 \times 73\text{ mm}$
HOLE SIZE: 75 MM
COLOR TEMPERATURE: 3000-4000-6500K
LIFETIME: 50000H



Powered by: **EPISTAR**
from Taiwan

8W

KDCM358 RD

WORKING VOLTAGE: AC90-300V 50/60Hz
POWER : 8W
LED TYPE: EPISTAR COB
CRI: ≥ 80
PF: ≥ 0.95
LUMINOUS FLUX: $\geq 720\text{lm}$
BEAM ANGLE: 40°
MATERIAL: Die-casting Aluminium
LAMP SIZE: $98 \times 73\text{ mm}$
HOLE SIZE: 85 MM
COLOR TEMPERATURE: 3000-4000-6500K
LIFETIME: 50000H

12W

KDCM3512 RD

WORKING VOLTAGE: AC90-300V 50/60Hz
POWER : 12W
LED TYPE: EPISTAR COB
CRI: ≥ 80
PF: ≥ 0.95
LUMINOUS FLUX: $\geq 1080\text{lm}$
BEAM ANGLE: 40°
MATERIAL: Die-casting Aluminium
LAMP SIZE: $98 \times 85\text{ mm}$
HOLE SIZE: 85 MM
COLOR TEMPERATURE: 3000-4000-6500K
LIFETIME: 50000H



E-mail : info@kcsadled.com
Website : www.kcsadled.com



LED SLIM COB SPOT LIGHT

15W/20W SQ



Powered by: **EPISTAR**
from Taiwan

15W

KDCM3715 SQ

WORKING VOLTAGE: AC90-300V 50/60Hz
POWER : 15W
LED TYPE: EPISTAR COB
CRI: ≥ 80
PF: ≥ 0.95
LUMINOUS FLUX: $\geq 1125\text{lm}$
BEAM ANGLE: 45°
MATERIAL: Die-casting Aluminium
LAMP SIZE: $106 \times 106 \times 30.5\text{ MM}$
HOLE SIZE: $95 \times 95\text{ MM}$
COLOR TEMPERATURE: 3000-6500K
LIFETIME: 50000H

20W

KDCM0420 SQ

WORKING VOLTAGE: AC90-300V 50/60Hz
POWER : 20W
LED TYPE: EPISTAR COB
CRI: ≥ 80
PF: ≥ 0.95
LUMINOUS FLUX: $\geq 1500\text{lm}$
BEAM ANGLE: 45°
MATERIAL: Die-casting Aluminium
LAMP SIZE: $116 \times 116 \times 32.5\text{ MM}$
HOLE SIZE: $105 \times 105\text{ MM}$
COLOR TEMPERATURE: 3000-6500K
LIFETIME: 50000H



E-mail : info@kcsadled.com
Website : www.kcsadled.com



LED SLIM COB SPOT LIGHT

15W/20W RD



Powered by: **EPISTAR**
from Taiwan

15W

KDCM3715 RD

WORKING VOLTAGE: AC90-300V 50/60Hz
POWER : 15W
LED TYPE: EPISTAR COB
CRI: ≥ 80
PF: ≥ 0.95
LUMINOUS FLUX: $\geq 1125\text{lm}$
BEAM ANGLE: 45°
MATERIAL: Die-casting Aluminium
LAMP SIZE: $106 \times 30.5\text{ MM}$
HOLE SIZE: 95 MM
COLOR TEMPERATURE: 3000-6500K
LIFETIME: 50000H

20W

KDCM0420 RD

WORKING VOLTAGE: AC90-300V 50/60Hz
POWER : 20W
LED TYPE: EPISTAR COB
CRI: ≥ 80
PF: ≥ 0.95
LUMINOUS FLUX: $\geq 1500\text{lm}$
BEAM ANGLE: 45°
MATERIAL: Die-casting Aluminium
LAMP SIZE: $116 \times 32.5\text{ MM}$
HOLE SIZE: 105 MM
COLOR TEMPERATURE: 3000-6500K
LIFETIME: 50000H



E-mail : info@kcsadled.com
Website : www.kcsadled.com



LED COB CABINET LIGHT

2W RD/SQ

2W

KDC22/KDC112 RD

WORKING VOLTAGE: AC90-300V 50/60Hz
POWER : 2W
LED TYPE: EPISTAR COB
CRI: ≥ 80
LUMINOUS FLUX: $\geq 170\text{lm}$
BEAM ANGLE: 45°
MATERIAL: Aluminium
LAMP SIZE: $\phi 50 \times 35/30 \times 20\text{MM}$
HOLE SIZE: $\phi 45/25\text{MM}$
COLOR TEMPERATURE: 3000-6500K/R/G/B
LIFETIME: 50000H



Powered by: **EPISTAR**
from Taiwan

2W

KDC22/KDC112 SQ

WORKING VOLTAGE: AC90-300V 50/60Hz
POWER : 2W
LED TYPE: EPISTAR COB
CRI: ≥ 80
LUMINOUS FLUX: $\geq 170\text{lm}$
BEAM ANGLE: 45°
MATERIAL: Aluminium
LAMP SIZE: $50 \times 35/30 \times 20\text{MM}$
HOLE SIZE: $45/25\text{MM}$
COLOR TEMPERATURE: 3000-6500K/R/G/B
LIFETIME: 50000H



E-mail : info@kcsadled.com
Website : www.kcsadled.com



LED COB SWING LIGHT

10W/12W/30W/40W

12W

KDCZ312 RD

WORKING VOLTAGE : AC100-300V 50/60Hz
POWER : 12W
CRI : ≥ 80
LUMINOUS FLUX : $\geq 960\text{lm}$
ROTATION : 90° Pop out & 350° Rotation
MATERIAL : Die-casting Aluminium
LAMP SIZE: 90*70MM
HOLE SIZE: 80 MM
COLOR TEMPERATURE : 3000-4000-6000K
LIFETIME : 50000H



30W

KDCZ630 RD

WORKING VOLTAGE : AC100-300V 50/60Hz
POWER : 30W
CRI : ≥ 80
LUMINOUS FLUX : $\geq 3200\text{lm}$
ROTATION : 90° Pop out & 350° Rotation
MATERIAL : Die-casting Aluminium
LAMP SIZE: 150*105MM
HOLE SIZE: 120MM
COLOR TEMPERATURE : 3000-4000-6000K
LIFETIME : 50000H

40W

KDCZ640 RD

WORKING VOLTAGE : AC100-300V 50/60Hz
POWER : 40W
CRI : ≥ 80
LUMINOUS FLUX : $\geq 4200\text{lm}$
ROTATION : 90° Pop out & 350° Rotation
MATERIAL : Die-casting Aluminium
LAMP SIZE: 185*120MM
HOLE SIZE: 155MM
COLOR TEMPERATURE : 3000-4000-6000K
LIFETIME : 50000H



LED COB FLOOD LIGHT

35W



35W

KDC9535

WORKING VOLTAGE: AC100-300V 50/60Hz

POWER :30W

LED TYPE: COB

CRI: ≥ 80

LUMINOUS FLUX: $\geq 2800lm$

BEAM ANGLE: 105°

MATERIAL: Aluminium

LAMP SIZE: 235*145*140MM

HOLE SIZE: 225*130MM

COLOR TEMPERATURE: 3000-6500K

LIFETIME: 50000H






E-mail : info@kcsadled.com
Website : www.kcsadled.com



LED SPOT LIGHT

Series



New ceiling spot light can adjust angle freely: IDEAL ANGLE IS DECIDED BY YOU!

The design concept is derived from the top grade watch which can adjust the world time zone. In addition to the swing projection effect of the basic ceiling spot light and the use of LED high power COB light source, specially designed the automatic regulation function with the beam angle between 15° and 45°.

Through the rotating disc on the frame, compare to the corresponding precise scale mark, you can over it smoothly and easily to acquire the ideal angle you want. Adjust the ideal angle by yourself, you will become the lighting designer.

 **KCSAD**^{LED}
...lights forever

NEW!

LED COB MOVABLE/ANGLE LIGHT

10W RD

10W

KDCAR410 SQ

WORKING VOLTAGE: AC90-300V 50/60Hz
POWER : 10W
LED TYPE: EPISTAR COB
CRI: ≥ 80
LUMINOUS FLUX: $\geq 750\text{lm}$
BEAM ANGLE: 45°
MATERIAL: Die-casting Aluminium
LAMP SIZE: 115*115*50MM
HOLE SIZE: 105*105MM
COLOR TEMPERATURE: 3000-6500K
LIFETIME: 50000H



Powered by: **EPISTAR**
from Taiwan



10W

KDCMA410 RD

WORKING VOLTAGE: AC100-300V 50/60Hz
POWER : 10W
LED TYPE: EPISTAR COB
CRI: ≥ 80
LUMINOUS FLUX: $\geq 750\text{lm}$
BEAM ANGLE: $15^\circ-45^\circ$
HANGING PLATE FIXED
MATERIAL: Lathe Aluminium
LAMP SIZE: $\Phi 98 \times 42\text{MM}$
COLOR TEMPERATURE: 3000K
LIFETIME: 50000H



E-mail : info@kcsadled.com
Website : www.kcsadled.com



Led Strip light can widely used to transform the interior and exterior area of any longitude. It can be used to make your walls and ceilings decorate with the extra light. This kind of product can be widely used in Showrooms, Gardens, Residential areas for decoration purposes.

Details	Input Power	Input Voltage	Colour Temperature	LED per mtr	IP	Chip/SMD	Operating Temperature	Size
KDS30-60	30 W	90-300V AC - 50Hz	WW	60	Ip20	2835	(-20 deg to 55 deg centigrade)	5 Mtr
KDS60-120	60W	90-300 V AC - 50Hz	WW	120	Ip20	2835	(-20 deg to 55 deg centigrade)	5 Mtr
KDS24-60	24 W	90-300 V AC - 50Hz	R/G/CW/WW	60	Ip20	3528	(-20 deg to 55 deg centigrade)	5 Mtr
KDS48-120	48 W	90-300 V AC - 50Hz	BLUE	120	Ip20	3528	(-20 deg to 55 deg centigrade)	5 Mtr
KDS72-60	72 W	90-300 V AC - 50Hz	WW/CW/B/R	60	Ip20	5050	(-20 deg to 55 deg centigrade)	5 Mtr
KDS60-72 IP	60 W	90-300 V AC - 50Hz	IP-67 WW	60	Ip67	5050	(-20 deg to 55 deg centigrade)	5 Mtr

Details	Input Power	Input Voltage	IP	Operating Temperature
KDPA2IP	20 W	12V (1.7 Amp)	Ip67	(-20 deg to 55 deg centigrade)
KDPA3IP	30 W	12V (2.5 Amp)	Ip67	(-20 deg to 55 deg centigrade)
KDPA4IP	48 W	12V (4 Amp)	Ip67	(-20 deg to 55 deg centigrade)
KDPA5IP	60 W	12V (5 Amp)	Ip67	(-20 deg to 55 deg centigrade)





LED OUTDOOR LIGHTING Series



LED SLEEKY STREET LIGHT

15W/30W/60W

15W

KDST15

WORKING VOLTAGE: AC90-300V 50/60Hz
POWER : 15W
CRI: ≥ 80
LUMINOUS FLUX: $\geq 1500\text{lm}$
SURGE PROTECTION: 2.5 KV
BEAM ANGLE: 120°
MATERIAL: Die-casting Aluminium
LAMP SIZE: $260 \times 75\text{ MM}$
COLOR TEMPERATURE: 3000-6500K
LIFETIME: 50000H



30W

KDST30

WORKING VOLTAGE: AC90-300V 50/60Hz
POWER : 30W
CRI: ≥ 80
LUMINOUS FLUX: $\geq 3000\text{lm}$
SURGE PROTECTION: 2.5 KV
BEAM ANGLE: 120°
MATERIAL: Die-casting Aluminium
LAMP SIZE: $300 \times 70\text{ MM}$
COLOR TEMPERATURE: 3000-6500K
LIFETIME: 50000H

60W

KDST60

WORKING VOLTAGE: AC90-300V 50/60Hz
POWER : 60W
CRI: ≥ 80
LUMINOUS FLUX: $\geq 6000\text{lm}$
SURGE PROTECTION: 2.5 KV
BEAM ANGLE: 120°
MATERIAL: Die-casting Aluminium
LAMP SIZE: $400 \times 120\text{ MM}$
COLOR TEMPERATURE: 3000-6500K
LIFETIME: 50000H



LED FLOOD LIGHT (REFLECTOR)

20W/40W/80W

20W

KDFR20

WORKING VOLTAGE: AC90-300V 50/60Hz
POWER : 20W
CRI: ≥ 80
PF: ≥ 0.95
LUMINOUS FLUX: $\geq 2000\text{lm}$
SURGE PROTECTION : 2.5 KV
PROTECTION RATING : IP65
MATERIAL: Die-casting Aluminium
LAMP SIZE: 190×137 MM
COLOR TEMPERATURE: 3000-6500K
LIFETIME: 50000H



40W

KDFR40

WORKING VOLTAGE: AC90-300V 50/60Hz
POWER : 40W
CRI: ≥ 80
PF : ≥ 0.95
LUMINOUS FLUX: $\geq 4000\text{lm}$
SURGE PROTECTION : 2.5 KV
PROTECTION RATING : IP65
MATERIAL: Die-casting Aluminium
LAMP SIZE: 292×214 MM
COLOR TEMPERATURE: 3000-6500K
LIFETIME: 50000H

80W

KDFR80

WORKING VOLTAGE: AC90-300V 50/60Hz
POWER : 80W
CRI: ≥ 80
PF : ≥ 0.95
LUMINOUS FLUX: $\geq 8000\text{lm}$
SURGE PROTECTION : 2.5 KV
PROTECTION RATING : IP65
MATERIAL: Die-casting Aluminium
LAMP SIZE: 345×260 MM
COLOR TEMPERATURE: 3000-6500K
LIFETIME: 50000H



E-mail : info@kcsadled.com
Website : www.kcsadled.com



LED FLOOD LIGHT

30W/50W/100W/150W/200W



30W, 50W, 100W, 150W, 200W

KDFL30, 50, 100, 150, 200

WORKING VOLTAGE: AC90-300V 50/60Hz

CRI: ≥ 80

PF : ≥ 0.95

LUMINOUS FLUX: $\geq 100\text{lm/W}$

SURGE PROTECTION : 2.5 KV

PROTECTION RATING : IP65

MATERIAL: Die-casting Aluminium

COLOR TEMPERATURE: 3000-6500K

LIFETIME: 50000H



E-mail : info@kcsadled.com
Website : www.kcsadled.com



LED FLOOD LIGHT

50W/100W/150W/200W/300W



50W, 100W, 150W, 200W, 300W

KDF50, 100, 150, 200, 300

WORKING VOLTAGE: AC90-300V 50/60Hz
LED TYPE: EPISTAR COB
CRI: ≥ 80
PF: ≥ 0.95
LUMINOUS FLUX: $\geq 100\text{lm/W}$
BEAM ANGLE: 40°
MATERIAL: Die-casting Aluminium
LAMP SIZE: $225 \times 110\text{ mm}$ (50W)
COLOR TEMPERATURE: 3000-6500K
LIFETIME: 50000H



E-mail : info@kcsadled.com
Website : www.kcsadled.com



LED HI-BAY

100W/150W/200W

100W

KDHB100

WORKING VOLTAGE: AC90-300V 50/60Hz
POWER : 100W
LED TYPE: EPISTAR COB
CRI: ≥ 80
PF: ≥ 0.95
LUMINOUS FLUX: $\geq 800\text{lm}$
BEAM ANGLE: 120°
MATERIAL: Die-casting Aluminium
LAMP SIZE: $300 \times 290\text{ MM}$
COLOR TEMPERATURE: 6500K
LIFETIME: 50000H



150W

KDHB150

WORKING VOLTAGE: AC90-300V 50/60Hz
POWER : 150W
LED TYPE: EPISTAR COB
CRI: ≥ 80
PF: ≥ 0.95
LUMINOUS FLUX: $\geq 12000\text{lm}$
BEAM ANGLE: 120°
MATERIAL: Die-casting Aluminium
LAMP SIZE: $300 \times 290\text{ MM}$
COLOR TEMPERATURE: 6500K
LIFETIME: 50000H

200W

KDHB200

WORKING VOLTAGE: AC90-300V 50/60Hz
POWER : 200W
LED TYPE: EPISTAR COB
CRI: ≥ 80
PF: ≥ 0.95
LUMINOUS FLUX: $\geq 16000\text{lm}$
BEAM ANGLE: 120°
MATERIAL: Die-casting Aluminium
LAMP SIZE: $300 \times 290\text{ MM}$
COLOR TEMPERATURE: 6500K
LIFETIME: 50000H



LED TRACK LIGHT

20W/30W/40W



20W/30W/40W

KDTL20,30,40

WORKING VOLTAGE: AC90-300V 50/60Hz

POWER : 20W/30W/40W

CRI: ≥ 80

PF: ≥ 0.95

LUMINOUS FLUX: $\geq 1600\text{lm}$ / 2400lm / 3200lm

PROTECTION RATING : IP20

BEAM ANGLE: 180°

MATERIAL : Die-casting Aluminium

COLOR TEMPERATURE: 3000-4000-6500K

LIFETIME: 50000H



E-mail : info@kcsadled.com
Website : www.kcsadled.com



LED CRYSTAL WALL WASHER

10W/5W×2 WW IP54

10W WW IP54

KDOU5

WORKING VOLTAGE : AC100-240V 50/60Hz


POWER : 10W WW IP54

CRI : ≥ 80

MATERIAL : Die-casting Aluminium

COLOR TEMPERATURE : 3000K

LIFETIME : 50000H

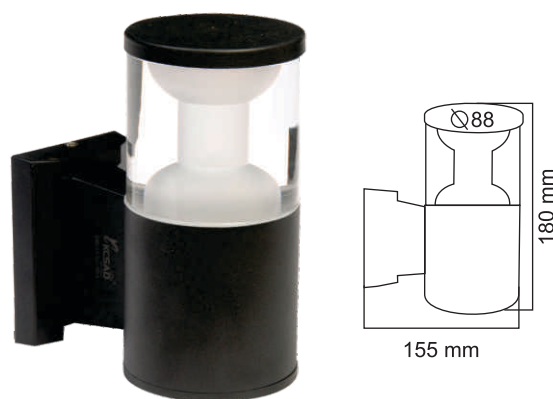

5W×2 WW IP54

KDOUW10

WORKING VOLTAGE : AC100-240V 50/60Hz

POWER : 5W×2 WW IP54

CRI : ≥ 80

MATERIAL : Die-casting Aluminium

COLOR TEMPERATURE : 3000K

LIFETIME : 50000H



BOLLARD LIGHT

5W WW IP54



5W WW IP 54

KDOB5

WORKING VOLTAGE : AC100-300V 50/60Hz

POWER : 5W WW IP54

CRI : ≥ 80

MATERIAL : Die-casting Aluminium

COLOR TEMPERATURE : 3000K

LIFETIME : 50000H



E-mail : info@kcsadled.com
Website : www.kcsadled.com



LED COB WALL WASHER

10W/10W×2 WW IP54

10W×2 WW IP54

KDOUD20

WORKING VOLTAGE : AC100-240V 50/60Hz


POWER : 10W×2 WW IP54

CRI : ≥ 80

MATERIAL : Die-casting Aluminium

COLOR TEMPERATURE : 3000K

LIFETIME : 50000H



10W WW IP54

KDOU10

WORKING VOLTAGE : AC100-240V 50/60Hz

POWER : 10W WW IP54

CRI : ≥ 80

MATERIAL : Die-casting Aluminium

COLOR TEMPERATURE : 3000K

LIFETIME : 50000H



LED COB UNDERWATER, UNDERGROUND GARDEN LIGHT SPYKE 5W B/R/G/WW IP68



5W B/R/G/WW IP68

KDUW6

WORKING VOLTAGE : AC100-240V 50/60Hz
POWER : 5W IP68
CRI : ≥ 80
MATERIAL : Die-casting Aluminium
COLOR TEMPERATURE : B/R/G/WW
LIFETIME : 50000H
UNDERWATER



5W B/R/G/WW IP68

KDGB5

WORKING VOLTAGE : AC100-240V 50/60Hz
POWER : 5W IP68
CRI : ≥ 80
MATERIAL : Die-casting Aluminium
COLOR TEMPERATURE : B/R/G/WW
LIFETIME : 50000H
UNDERGROUND



5W WW IP68

KDGL5

WORKING VOLTAGE : AC100-240V 50/60Hz
POWER : 5W IP68
CRI : ≥ 80
MATERIAL : Die-casting Aluminium
COLOR TEMPERATURE : B/R/G/WW
LIFETIME : 50000H
GARDEN LIGHT SPYKE



E-mail : info@kcsadled.com
Website : www.kcsadled.com



LED SPYKE LIGHT, COB WALL WASHER, COB CORNER LIGHT

3W/5W



5W WW IP65

KDGS5

WORKING VOLTAGE : AC100-240V 50/60Hz
POWER : 5W IP65
CRI : ≥ 80
MATERIAL : Die-casting Aluminium
COLOR TEMPERATURE : WW
LIFETIME : 50000H
SPYKE



5W $\times$ 2 WW IP54

KDOUD10

WORKING VOLTAGE : AC100-240V 50/60Hz
POWER : 5W $\times$ 2 IP54
CRI : ≥ 80
MATERIAL : Die-casting Aluminium
COLOR TEMPERATURE : WW
LIFETIME : 50000H
WALL WASHER UP & DOWN

3W WW IP65

KDF23 SQ

WORKING VOLTAGE : AC100-240V 50/60Hz
POWER : 3W IP65
CRI : ≥ 80
MATERIAL : Die-casting Aluminium
COLOR TEMPERATURE : B/R/G/WW
LIFETIME : 50000H
CORNER LIGHT



LED WALL WASHER, LED UNDERGROUND

3W/5W/10W



5W x 2 WW IP67

KDTUD10

WORKING VOLTAGE : AC100-240V 50/60Hz
POWER : 5W x 2 IP67
CRI : ≥ 80
MATERIAL : Die-casting Aluminium
COLOR TEMPERATURE : WW
LIFETIME : 50000H
Wall Washer UP & Down



3W WW IP68

KDGB3

WORKING VOLTAGE : AC100-240V 50/60Hz
POWER : 3W IP68
CRI : ≥ 80
MATERIAL : Die-casting Aluminium
COLOR TEMPERATURE : B/R/G/WW
LIFETIME : 50000H
UNDERGROUND

5W WW IP67

KDOU5

WORKING VOLTAGE : AC100-240V 50/60Hz
POWER : 5W IP67
CRI : ≥ 80
MATERIAL : Die-casting Aluminium
COLOR TEMPERATURE : WW
LIFETIME : 50000H
Wall Washer Up & Down



E-mail : info@kcsadled.com
Website : www.kcsadled.com



LED BULK HEAD

8W



IP65

8W

KDBH08

WORKING VOLTAGE: AC90-300V 50/60Hz

POWER : 8W

CRI: ≥ 80

PF: ≥ 0.95

LUMINOUS FLUX: $\geq 880\text{lm}$

PROTECTION RATING : Ip65

BEAM ANGLE: 180°

HOUSING MATERIAL: ABS, POLY CARBONATE

LAMP SIZE: $205 \times 80\text{ mm}$

COLOR TEMPERATURE: 2700-6500K

LIFETIME: 50000H



E-mail : info@kcsadled.com
Website : www.kcsadled.com





KCSAD LIGHTS (INDIA)

1, Waryana Complex, Leather Complex Road, Jalandhar-144021, (Punjab)

Website : www.kcsadled.com, Toll free no : 1800 833 2424

 [facebook.com / kcsadlightsindia](https://facebook.com/kcsadlightsindia)